

Technical sheet

PVC MARBLE SHEET

■ PVC Marble Sheet



Material	35% Pvc + 62% Caco3 + 3% Additive
Size/pc	1220mm*2440mm
Thickness	3mm
Weight/pc	18.5Kg
Structure	pvc basement + pvc film + uv coating
Features	(1) Fireproof, B1 grade (2) Waterproof / moistureproof (3) Vivid marble colors

Installation

PVC MARBLE SHEET

01



Measure and cut

Make sure the base wall is clean the bottom to be fully dry,
Measure the wall size and use utility knife to cut the pvc marble sheet.

02



Double side tape and structural glue

Stick Double-sided tape around the wall panel, and then use structural adhesive at other positions, remove the separation paper of double-side tape

Installation

PVC MARBLE SHEET

03



Stick the panel

Within 10 minutes, bond the panel to the fixed position.


Press the panel by hand to fully bond. Please note that you cannot move or re-stick.

04



Finish

Maintain for 1 day to ensure that the glue is completely firm.

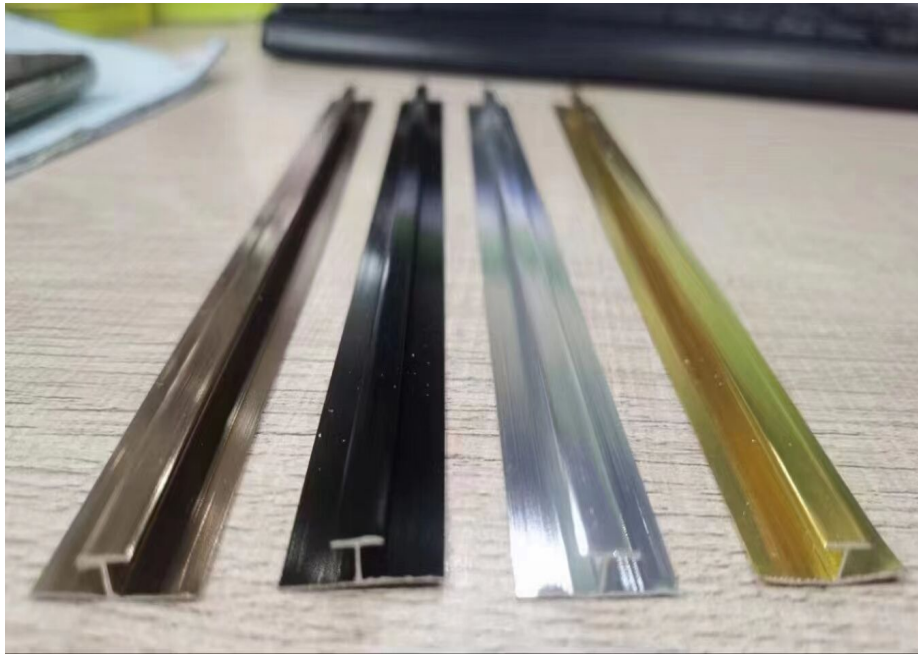



COMBINE STRIP

USE FOR MAKE TWO
PIECE TOGETHER



Application Effect

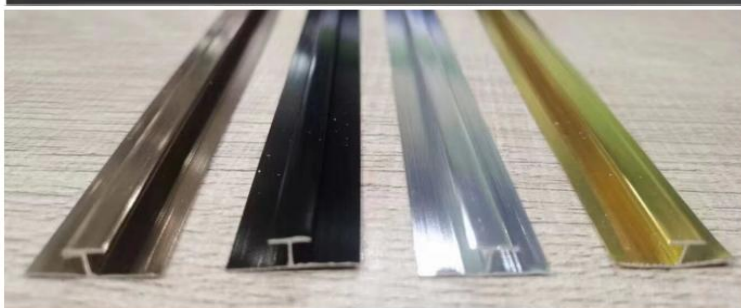

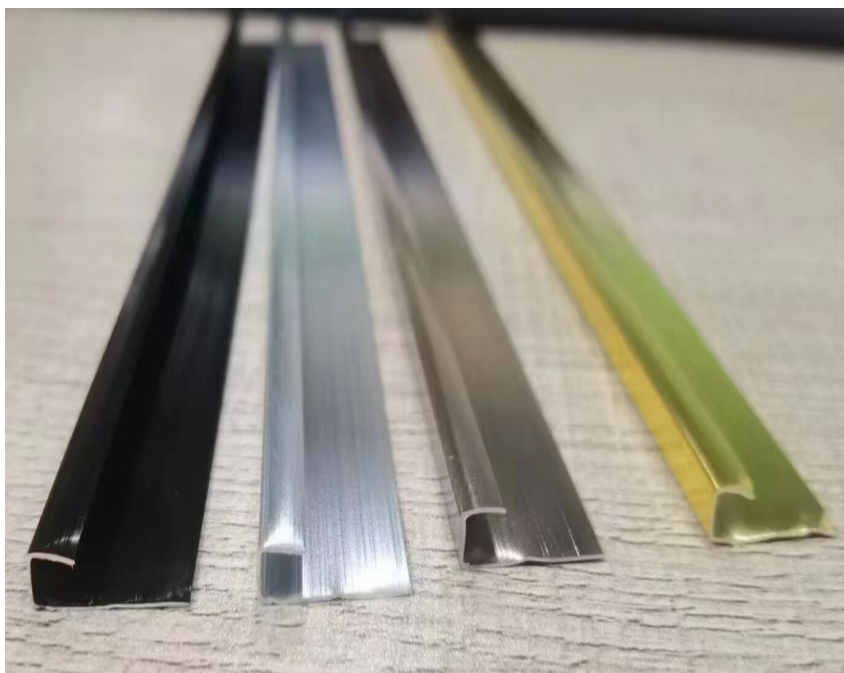



END CAP

USE FOR THE END OF WALL



Application Effect

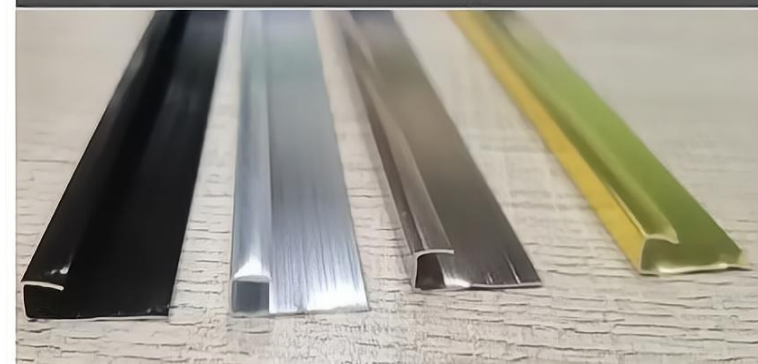

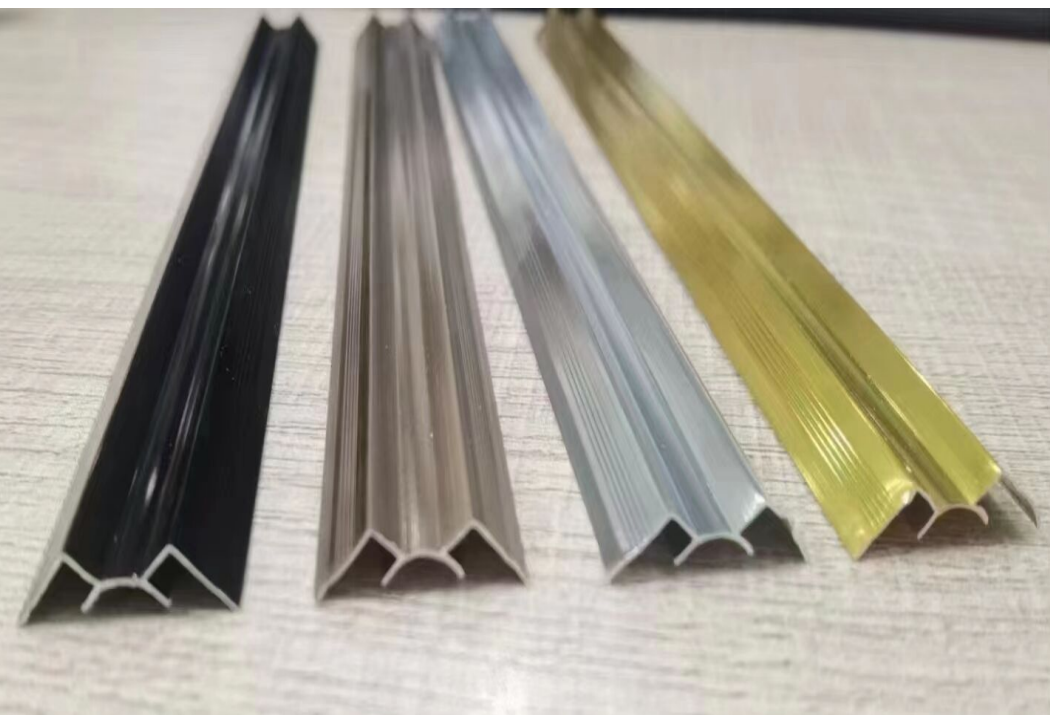

EXTERNAL CORNER

USE FOR THE END OF
TWO PIECE TOGETHER



External Corner

Application Effect

